


PROFI-5060

The PROFI-5060 is one of the PROFIBUS DP series products produced by ICP DAS. It provides the PROFIBUS DP communication protocol with any DP-Masters. The PROFI-5060 provides $\pm 4\text{KV}$ ESD protection contacting for all terminals (include I/O Terminals and PROFIBUS connector). By applying the PROFI-5060, users can easily establish a PROFIBUS DP network with other DP-Masters. In advance, it can be used in the application of building automation, remote data acquisition, environment control and monitoring, laboratory equipment & research, factory automation, etc..

Pin Assignments


- Support for PROFIBUS DP-V0 protocol
- Detect transmission rate automatically(Max. 12Mbps)
- Address 0~99 set by rotary switches
- Network Isolation Protection
- 3000VDC isolation protection on PROFIBUS side
- 4KV ESD Protection (contact for any terminal).
- Wide range of power input (DC 10~40VDC) and operating temperature (-25°C~+75°C)

Female D-Sub Connector

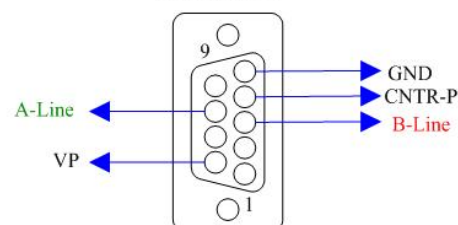


Pin No.	Signal	Meaning
3	B-Line	Receive/Transmit data - plus
4	CNTR-P	Repeater control signal, RTS signal
5	GND	Power ground of active terminator
6	VP	Power 5 volt of active terminator
8	A-Line	Receive/Transmit data - minus

Design Flowchart

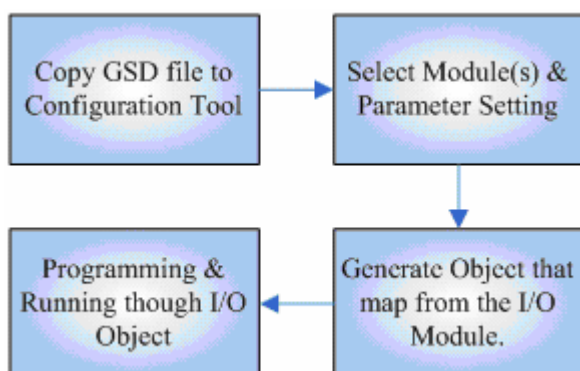

Item	PROFI-5055
PROFIBUS Interface	9-pin D-Sub(Female)
PROFIBUS Controller	Profichip VPCLS2
PROFIBUS Transceiver	ADI ADM2486 iCoupler Isolated Transceiver
Transmission Rate	Up to 12Mbps
Digital Input	8 Channels (Sink or Source), Isolated from each other
	Off Voltage Level: +1V Max. On Voltage Level: +4 ~ +30V
	Input Impedance: 3K Ω in series with opto-coupler
	Isolation Voltage: 3750Vrms
Digital Output	4 Channels (Form C)
	Contact Rating: 0.6A@125V _{AC} , 2A@30V _{DC}
	Operating Time (Typical): 3ms.
	Release Time (Typical): 2ms.
	Minimum Life: 500,000 Ops.
Power Requirement	10V ~ 40V
Power Consumption	1W
Operating Temp.	-25 $^{\circ}$ C ~ +75 $^{\circ}$ C
Storage Temp.	-30 $^{\circ}$ C ~ +85 $^{\circ}$ C
Humidity	5% ~ 95% Non-condensing
Dimensions	91 mm x 128 mm x 52 mm

Application

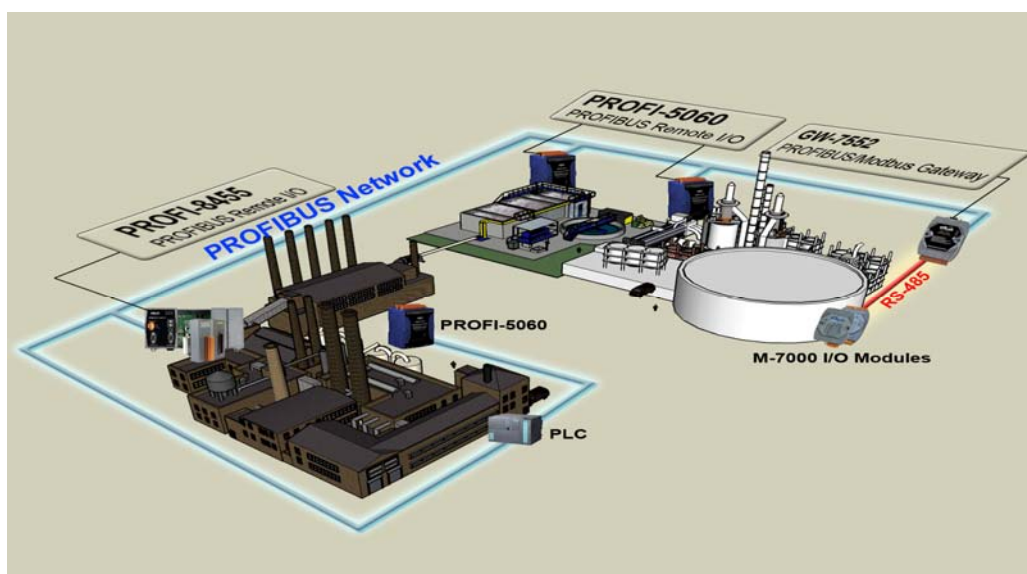

Ordering Information

PROFI-5060 CR	Art. No. 123959	PROFIBUS Remote I/O Module (8-channel Isolated Digital Input and 4-channel Relay Output)
----------------------	-----------------	---